




# Lifta bifacciale – cornice da 10 cm

## Bocca fuoco alta 50 cm

L  
I  
F  
T  
A  
  
D  
5  
0  
  
K  
1  
0

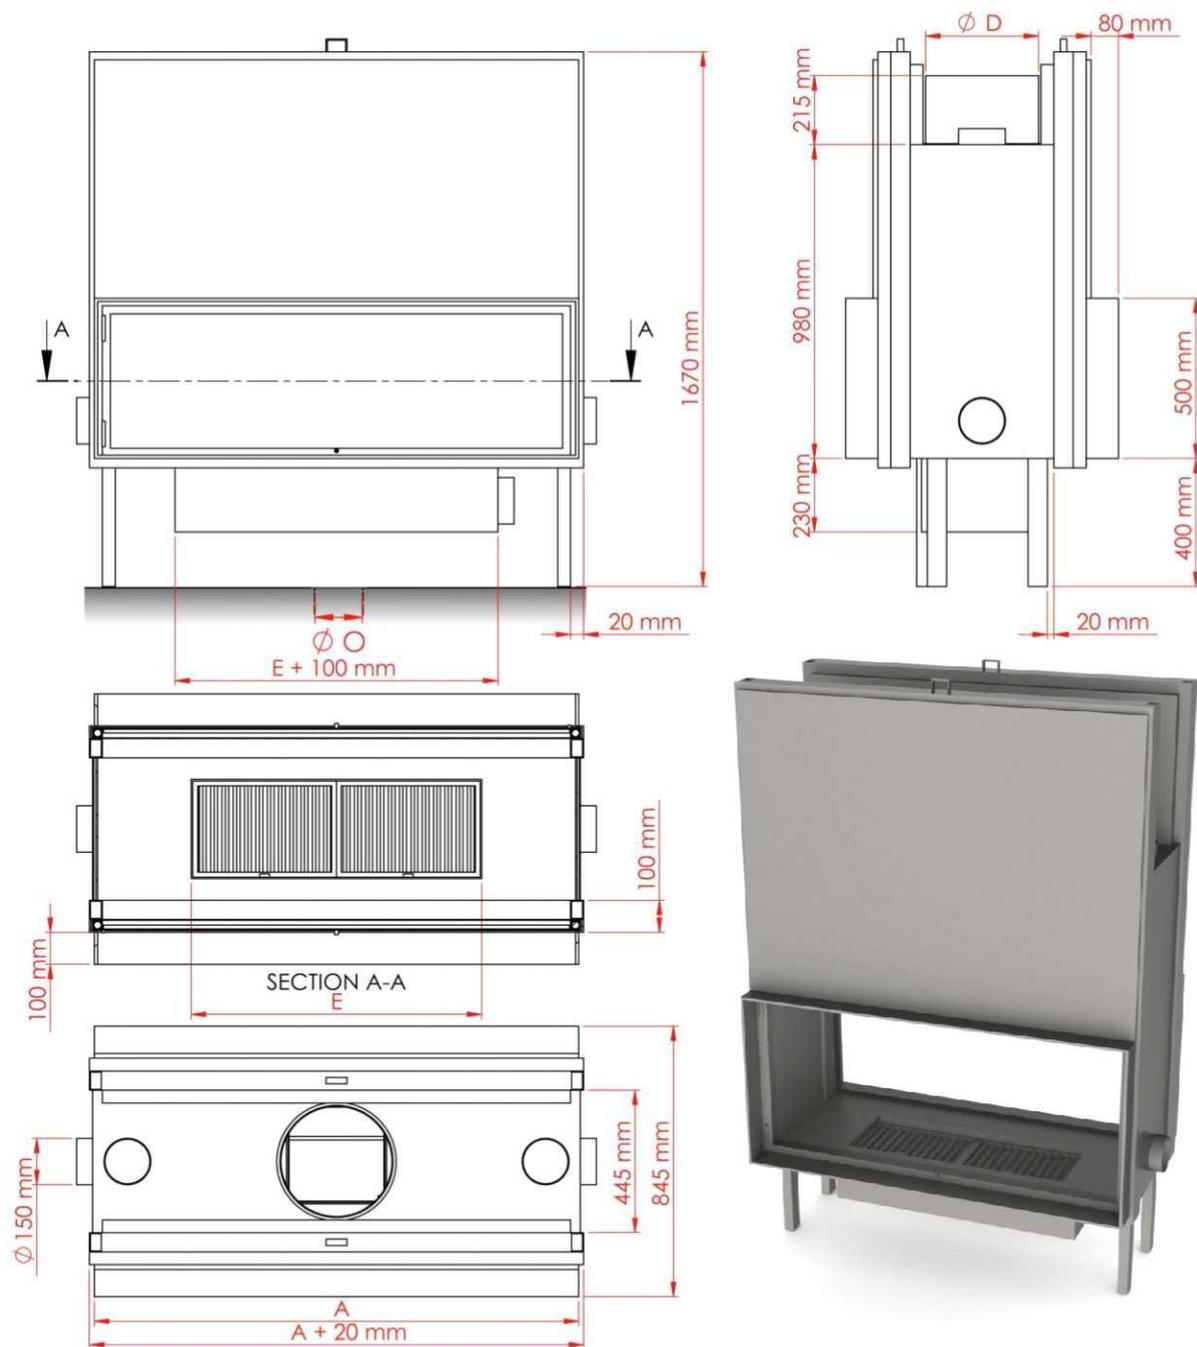

Order no.	A (mm)	D (mm)	E (mm)	O (mm)	Consumption air m <sup>3</sup> /h	Weight Kg
LI 1 D50 K10	800	200	600	150	288	~355
LI 2 D50 K10	900	250	600	150	325	~380
LI 3 D50 K10	1000	300	600	150	360	~400
LI 4 D50 K10	1250	300	800	150	450	~465
LI 5 D50 K10	1500	350	900	150	540	~530
LI 6 D50 K10	1750	350	1000	200	630	~590
LI 7 D50 K10	2000	350	1000	200	800	~650