
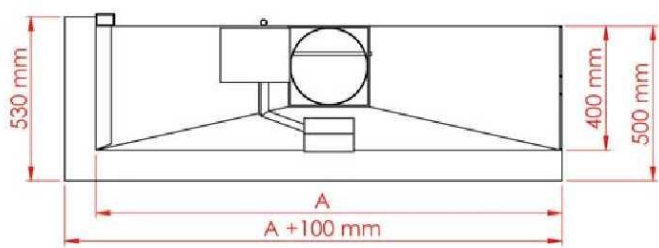
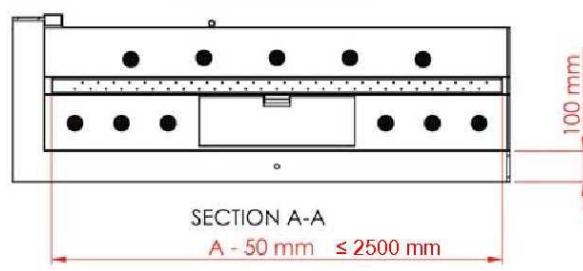
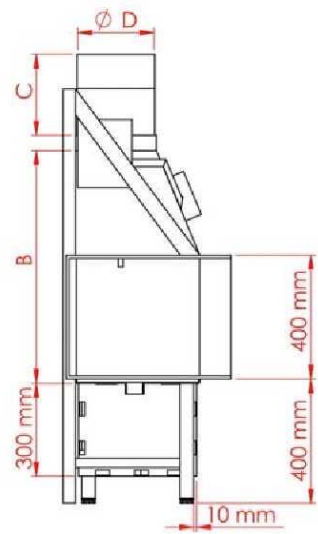


Angolare

1 lato corto aperto – destro o sinistro

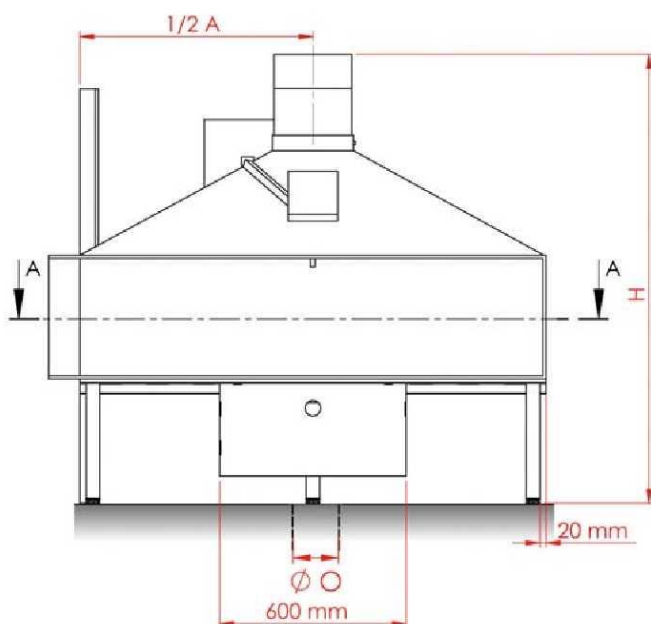

Attacco gas
Corrente elettrica
4 piedini regolabili

| Order nr | A (mm) | B (mm) | C (mm) | D (mm) -fan / +fan | H (mm) | O (mm) | Gas ø (mm) | Kg | Fresh air m³/h | m³/h natural gas | Gas C° | kW |
|----------|--------|--------|--------|-----------------------|--------|--------|------------|------|----------------|------------------|--------|----------|
| NI G0 H1 | 1000 | 750 | 260 | 250 | 1460 | 150 | 18 mm | ~125 | 435 | 1.15 | 99°C | 5,0-11,0 |
| NI G1 H1 | 1250 | 750 | 260 | 250 | 1460 | 150 | 18 mm | ~135 | 505 | 1.40 | 101°C | 5,0-13,0 |
| NI G2 H1 | 1500 | 750 | 260 | 300 | 1460 | 150 | 22 mm | ~150 | 575 | 1.70 | 108°C | 6,5-15,6 |
| NI G3 H1 | 1750 | 750 | 260 | 300 | 1460 | 150 | 22 mm | ~165 | 650 | 2.00 | 113°C | 6,5-17,0 |
| NI G4 H1 | 2000 | 750 | 260 | 350 | 1460 | 150 | 22 mm | ~180 | 720 | 2.30 | 117°C | 7,0-17,8 |
| NI G5 H1 | 2250 | 850 | 310 | 350-300 | 1610 | 200 | 22 mm | ~200 | 795 | 2.40 | 119°C | 8,4-19,0 |
| NI G6 H1 | 2500 | 950 | 310 | 350-300 | 1710 | 250 | 22 mm | ~225 | 865 | 2.50 | 120°C | 8,5-22,0 |
| NI G7 H1 | 3000 | 1050 | 310 | 400-300 | 1810 | 250 | 22 mm | ~260 | 940 | 2.75 | 121°C | 8,5-22,0 |
| NI G8 H1 | 3500 | 1150 | 310 | 400-300 | 1910 | 250 | 22 mm | ~310 | 1080 | 2.90 | 121°C | 8,5-22,0 |