

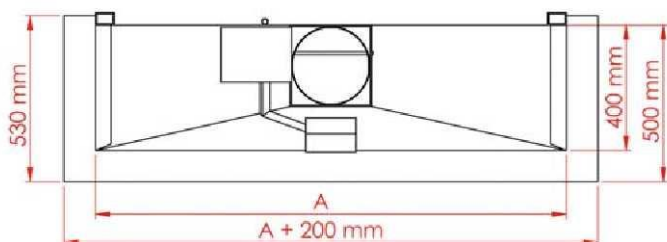
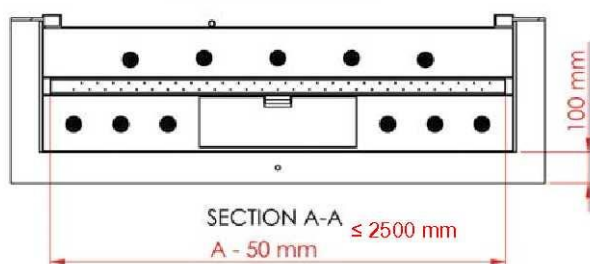


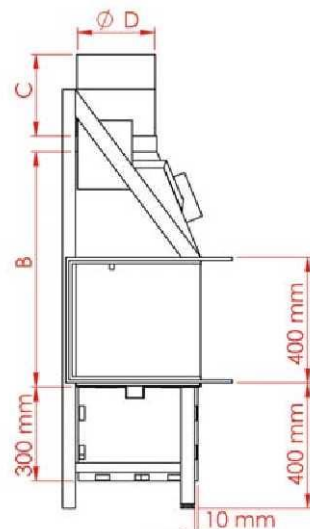

Panoramico

2 lati corti chiusi con vetrino

NIPPONG H2G

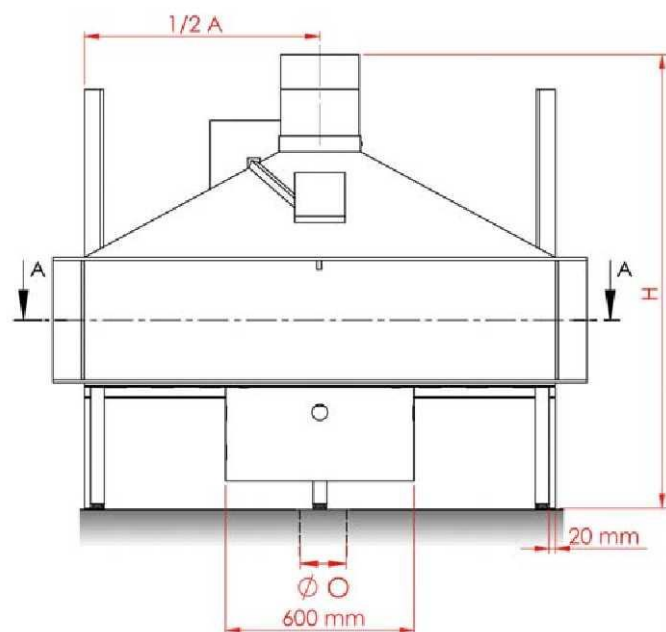

Collegamento gas
Corrente elettrica
4 piedini regolabili

Order nr.	A (mm)	B (mm)	C (mm)	D (mm) -fan / +fan	H (mm)	O (mm)	Gas ø (mm)	Kg	Fresh air m ³ /h	Gas C°	kW
NI G0 H2 G	1000	750	260	200	1460	150	18 mm	~150	288	99°C	5,0-11,0
NI G1 H2 G	1250	750	260	250	1460	150	18 mm	~170	360	101°C	5,0-13,0
NI G2 H2 G	1500	750	260	250	1460	150	22 mm	~180	432	108°C	6,5-15,6
NI G3 H2 G	1750	750	260	300	1460	150	22 mm	~190	504	113°C	6,5-17,0
NI G4 H2 G	2000	750	260	300	1460	150	22 mm	~210	576	117°C	7,0-17,8
NI G5 H2 G	2250	850	310	350-300	1610	200	22 mm	~230	648	119°C	8,4-19,0
NI G6 H2 G	2500	950	310	350-300	1710	200	22 mm	~250	720	120°C	8,5-22,0
NI G7 H2 G	3000	1050	310	350-300	1810	200	22 mm	~290	864	121°C	8,5-22,0
NI G8 H2 G	3500	1150	310	400-300	1910	200	22 mm	~335	1008	121°C	8,5-22,0