
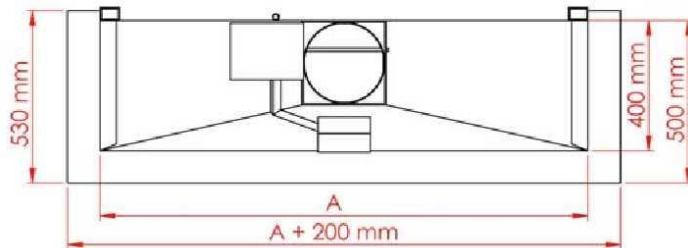
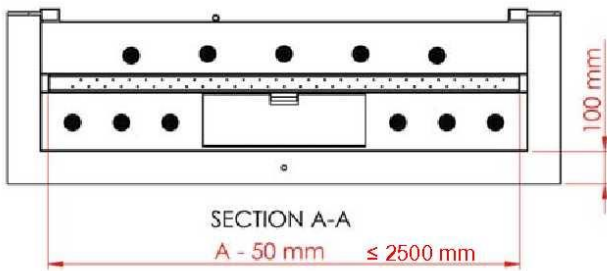
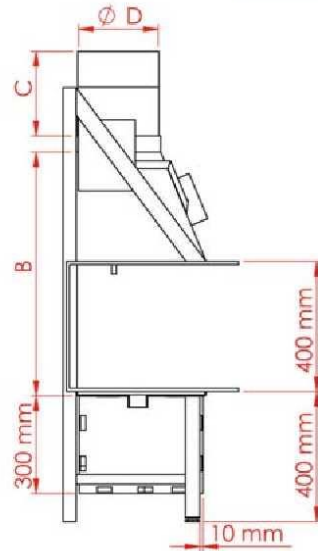


N
I
P
P
O
N
G
H2

Panoramico

2 lati corti aperti

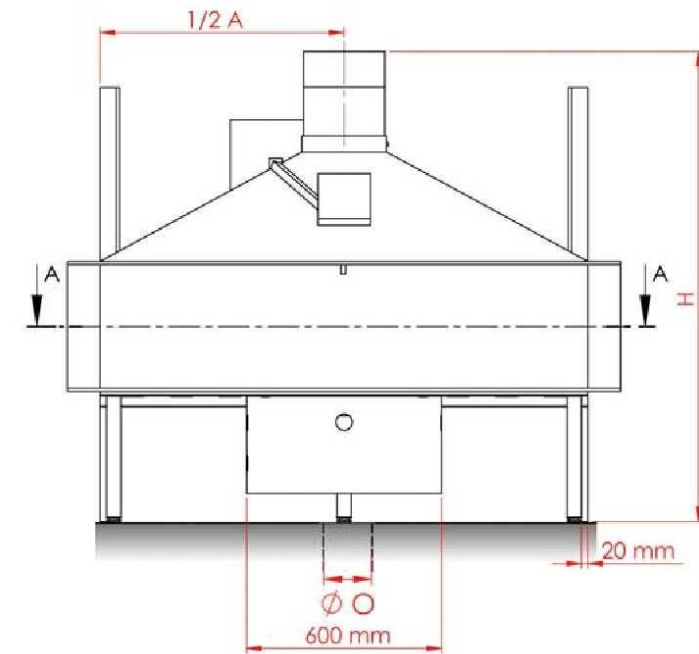

Attacco gas
Corrente elettrica
4 piedini regolabili

Order nr	A (mm)	B (mm)	C (mm)	D (mm) -fan / +fan	H (mm)	O (mm)	Gas ø (mm)	Weight Kg	Fresh air m³/h	Gas C°	kW
NI G0 H2	1000	750	260	300	1460	150	18 mm	~140	576	99°C	5,0-11,0
NI G1 H2	1250	750	260	300	1460	150	18 mm	~150	650	101°C	5,0-13,0
NI G2 H2	1500	750	260	350	1460	150	22 mm	~170	720	108°C	6,5-15,6
NI G3 H2	1750	750	260	350	1460	150	22 mm	~180	792	113°C	6,5-17,0
NI G4 H2	2000	750	260	400	1460	150	22 mm	~200	865	117°C	7,0-17,8
NI G5 H2	2250	850	310	350-300	1610	200	22 mm	~220	936	119°C	8,4-19,0
NI G6 H2	2500	950	310	350-300	1710	250	22 mm	~240	1008	120°C	8,5-22,0
NI G7 H2	3000	1050	310	350-300	1810	250	22 mm	~280	1155	121°C	8,5-22,0
NI G8 H2	3500	1150	310	400-300	1910	250	22 mm	~325	1300	121°C	8,5-22,0