

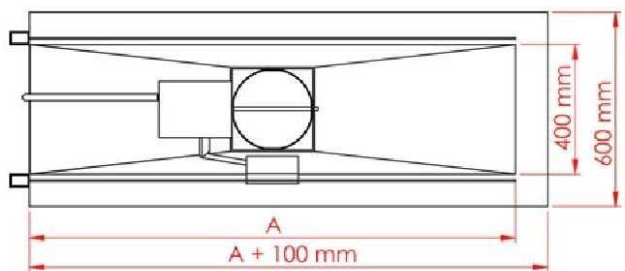
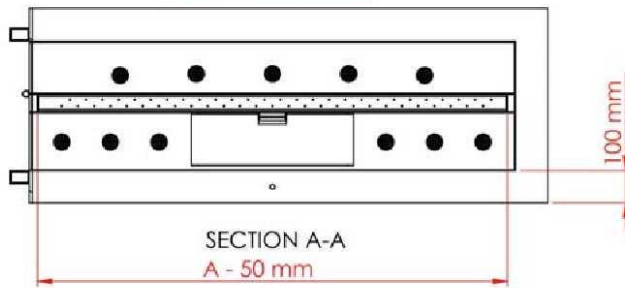


Trifacciale

2 lati lunghi e 1 corto aperti

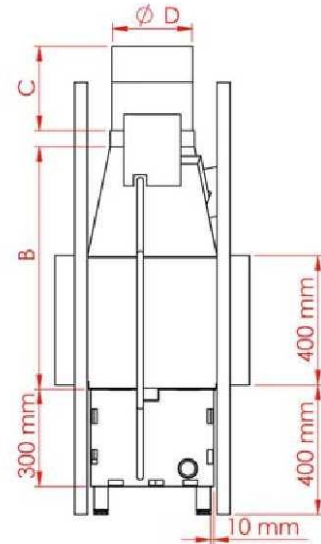

N
I
P
P
O
N
G
H3

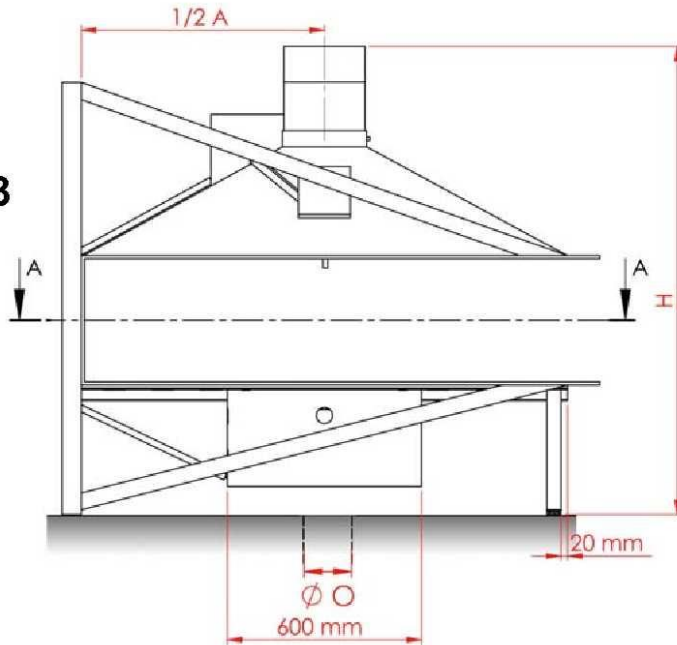

Collegamento gas
Corrente elettrica
4 piedini regolabili

Order nr	A (mm)	B (mm)	C (mm)	D (mm) -fan / +fan	H (mm)	O (mm)	Gas ø (mm)	Weight Kg	Fresh air m³/h	Gas C°	kW
NI G0 H3	1000	750	260	300-300	1460	150	18 mm	~135	690	99°C	5,0-11,0
N G1 H3	1250	750	260	350-300	1460	150	18 mm	~150	835	101°C	5,0-13,0
N G2 H3	1500	750	260	350-300	1460	150	22 mm	~170	980	108°C	6,5-15,6
N G3 H3	1750	750	260	400-300	1460	200	22 mm	~185	1125	113°C	6,5-17,0
NI G4 H3	2000	750	260	400-300	1460	200	22 mm	~200	1300	117°C	7,0-17,8