


Bifacciale – 1 lato aperto 1 lato chiuso con vetro



N
I
P
P
O
N
H
D
G

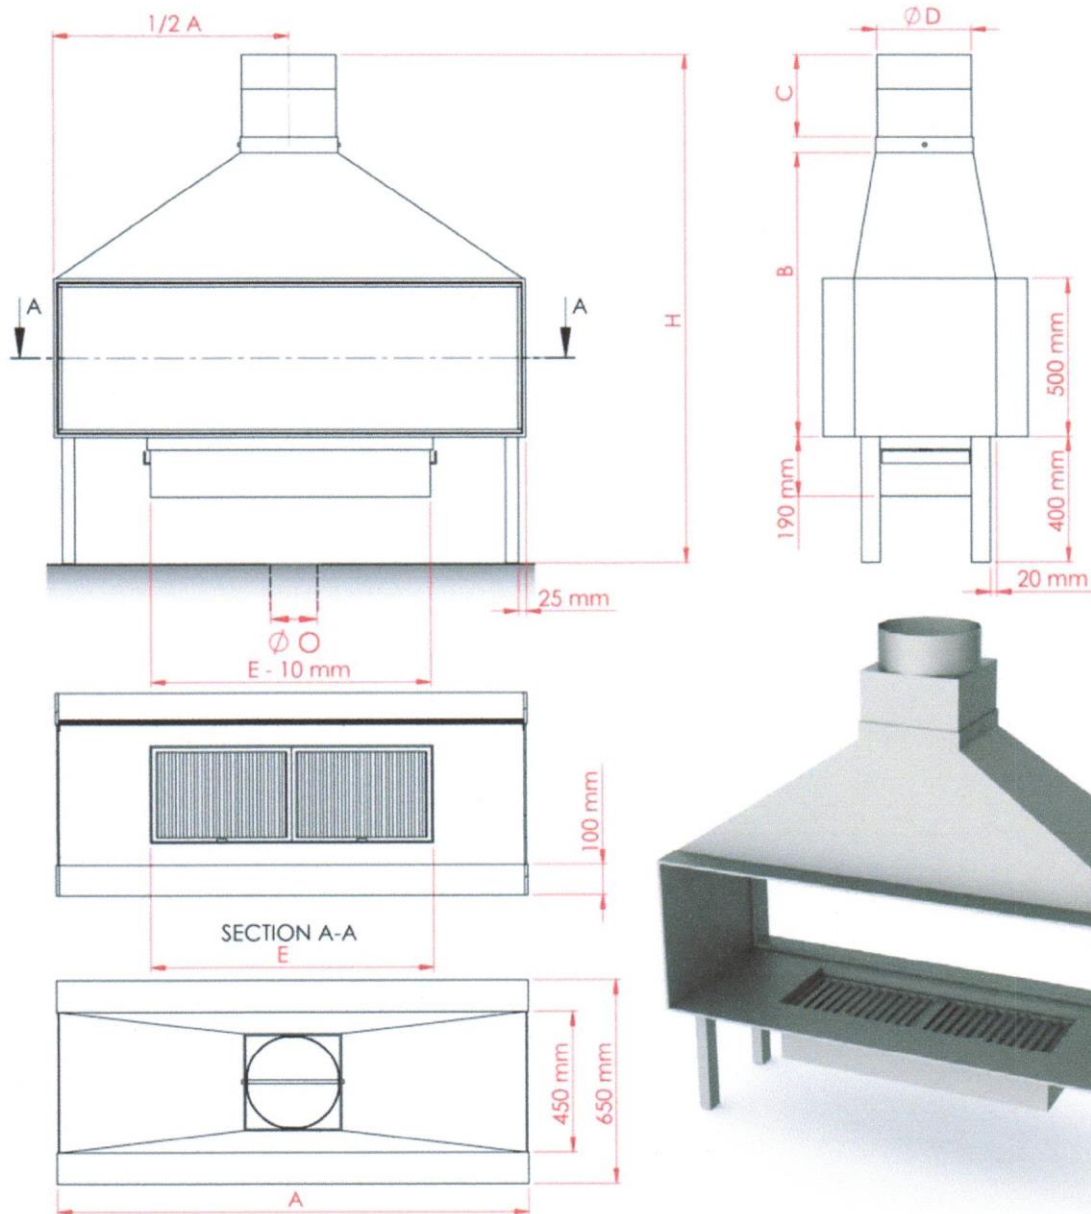

Order no.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	H (mm)	O (mm)	Consumption air m ³ / h	Weight kg
NIPPON H0 D G	1000	900	260	250	600	1610	150	360	~110
NIPPON H1 D G	1250	900	260	250	800	1610	150	450	~130
NIPPON H2 D G	1500	900	260	300	900	1610	150	540	~145
NIPPON H3 D G	1750	900	260	300	1000	1610	150	630	~160
NIPPON H4 D G	2000	900	260	350	1000	1610	150	720	~175