
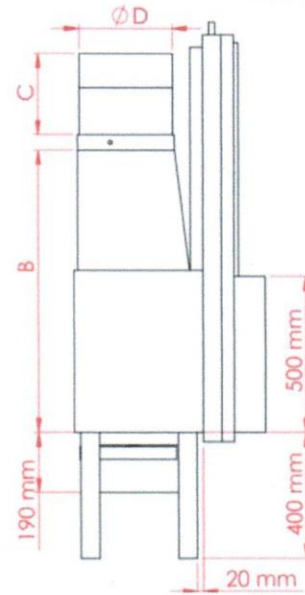


Frontale con portellone saliscendi perforato

N
I
P
P
O
N

H

V
S

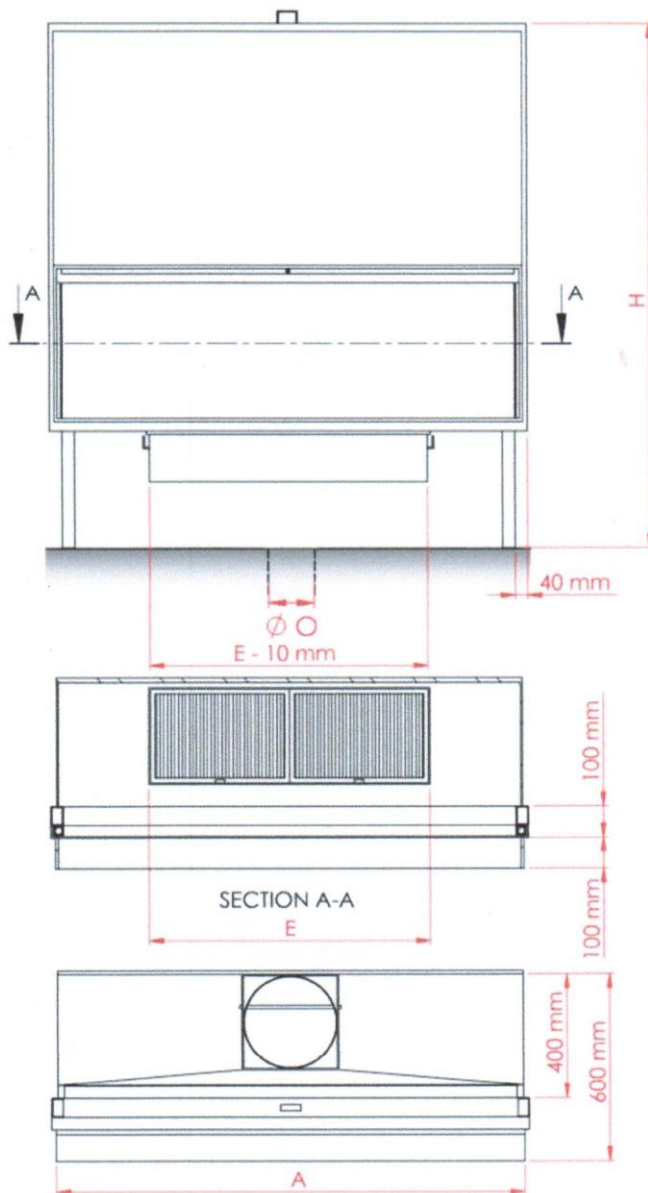

Order no.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	H (mm)	O (mm)	Consumption air m ³ / h	Weight kg
NIPPON H0 VS	1000	900	260	250	600	1670	150	360	~295
NIPPON H1 VS	1250	900	260	250	800	1670	150	450	~320
NIPPON H2 VS	1500	900	260	300	900	1670	150	540	~380
NIPPON H3 VS	1750	900	260	300	1000	1670	200	630	~340
NIPPON H4 VS	2000	900	260	350	1000	1670	200	720	~400
NIPPON H5 VS	2250	1000	310	350	1000	1820	200	810	~520
NIPPON H6 VS	2500	1100	310	350	1100	1920	200	900	~590